

TECHNICAL SPECIFICATION

ODB

A	March 9, 2018	Francis	Jane	Felix
Version	Date	Prepared	Reviewed	Approved

1. Optic Distribution Box, ZTT-1306-16P, Unload with Pole mounting Accessories

1.1 General properties:



Note: the picture provides a reference only!

1.2 Application

- For fiber's splicing, distributing and protection.

1.3 Equipment Characteristics

- Pole mounting, lock design.
- Unattached cable access for butterfly cable and fixing fittings.
- good anti-aging performance with beautiful appearance.
- Operation: smooth and easy wiring.
- Compact structure, good dustproof property.

1.4 Specification


- Longevity: >15 years.
- Operation Environment Temperature : -25°C ~ +55°C.
- Protection level: IP55
- Relative humidity: ≤85%
- Product measure: 301mm (H)*224mm (W)*73mm (D)

Note: Nominal size may vary \pm 5mm.


1.5 Ordering information

- Indicate the number of optic fiber cable installing.
- Indicate the number of optic fiber splicing.

1.6 Product Diameter

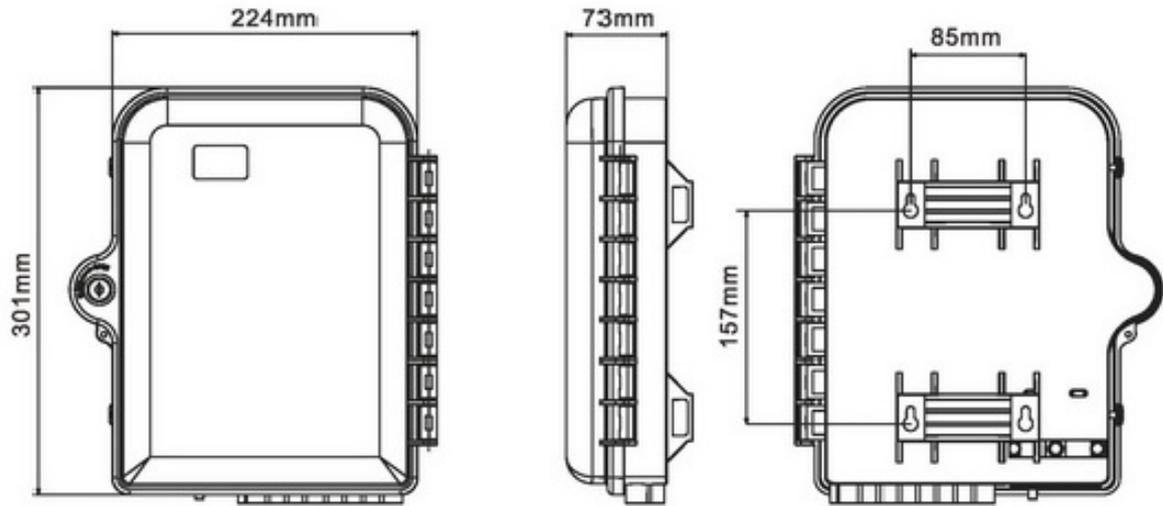

1.7 Installation

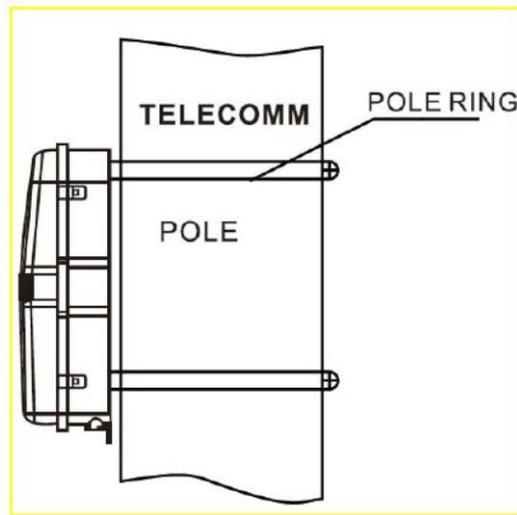

Pole mounted installation