

## Network Keyboard KB-1100-E



## Features


- Simple appearance and buttons layout, aesthetic and user-friendly.
- 4-inch display screen provides clear image with more details.
- 4D joystick for PTZ control (move up/down/left/right, focus, zoom).
- Uses Hoare joystick with high control precision and stability, effectively extending the lifetime.
- Power on/off button on the keyboard, convenient and energy-saving.
- Simple and clear keyboard configuration, easy for use and maintenance.
- Supports playing video on video wall and control video.
- Supports keyboard lock.
- Allows to set multiple-level user permissions.

## Specifications

| Model                               | KB-1100-E                    |
|-------------------------------------|------------------------------|
| General                             |                              |
| Screen Size                         | 4 inches                     |
| Joystick                            | Four-dimensional joystick    |
| Max Power Consumption (W)           | <5                           |
| Product Dimensions (W × H × D) (mm) | 345.00 x 189.82 x 128.16     |
| Weight (kg)                         | 1.2                          |
| Operating Temperature               | -10°C to 55°C                |
| Operating Humidity                  | 10% to 90% RH, noncondensing |
| Other Interfaces                    |                              |

|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| Serial Port       | 1 x RS232 (DB9, reserved)<br>2 x RS485 (half-duplex, reserved) |
| Console           | 1 x Console/RS485 shared interface (RJ45)                      |
| USB               | 2 x USB (reserved)                                             |
| Network Interface | 1 x RJ45, 10M/100M/1000M Based-T adaptive interface            |
| Power             | DC 12 V                                                        |
| RST               | 1 x Reset button                                               |

## Dimensions

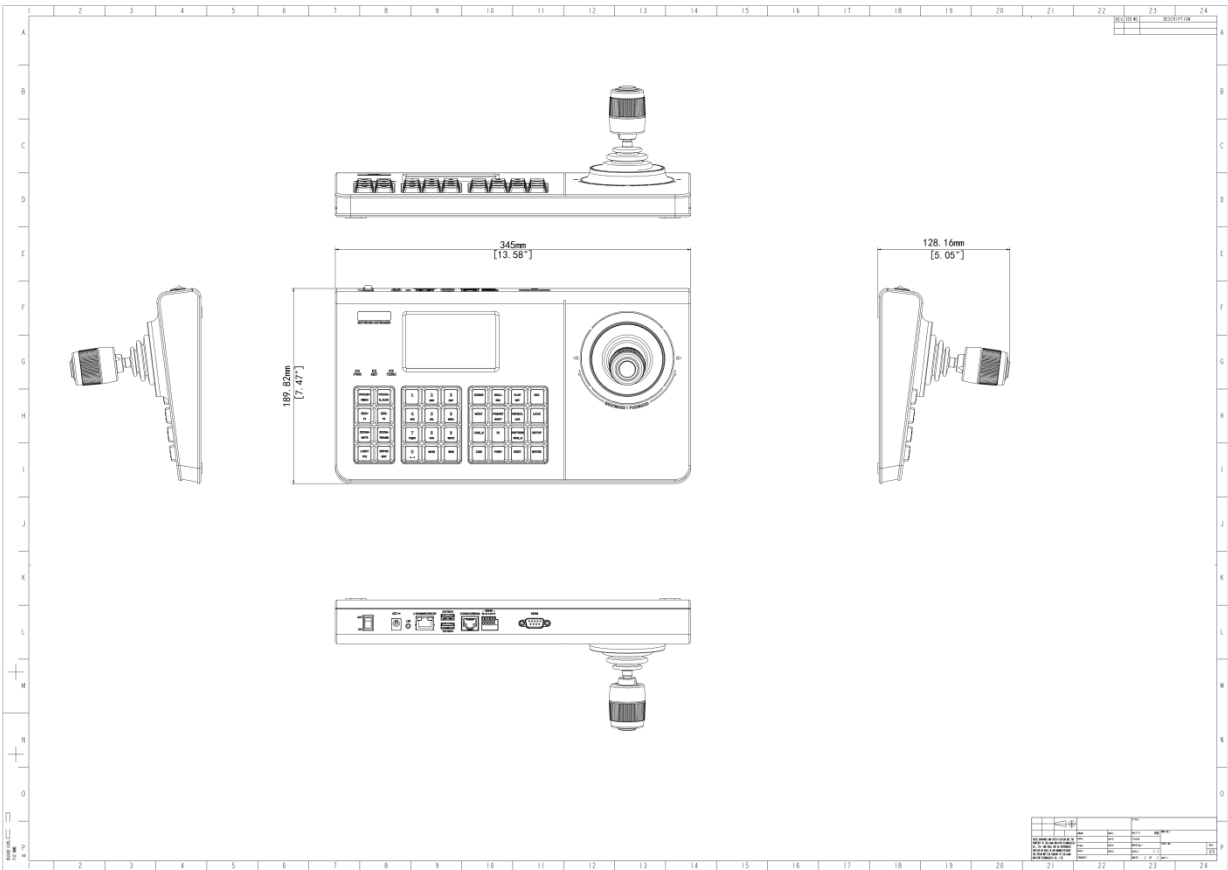

## Interface



| No. | Interface     | Description                                       |
|-----|---------------|---------------------------------------------------|
| 1   | RS232         | RS232 serial interface (reserved)                 |
| 2   | RS485         | RS485 serial interface (reserved)                 |
| 3   | Console/RS485 | 1*Console/RS485 shared interface (RJ45)           |
| 4   | USB           | 2*USB 2.0 interface (reserved)                    |
| 5   | Network       | 1*RJ45, 10M/100M/1000M Based-T adaptive interface |
| 6   | RST           | 1*Reset button                                    |
| 7   | Power supply  | DC 12V                                            |
| 8   | Power switch  | Power on/off                                      |

# Unlimited New View

**Zhejiang Uniview Technologies Co., Ltd.**

-  <http://www.uniview.com>
-  [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)
-  No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.  
\*Product specifications and availability are subject to change without notice.  
Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.